


SP 11

Performance curves

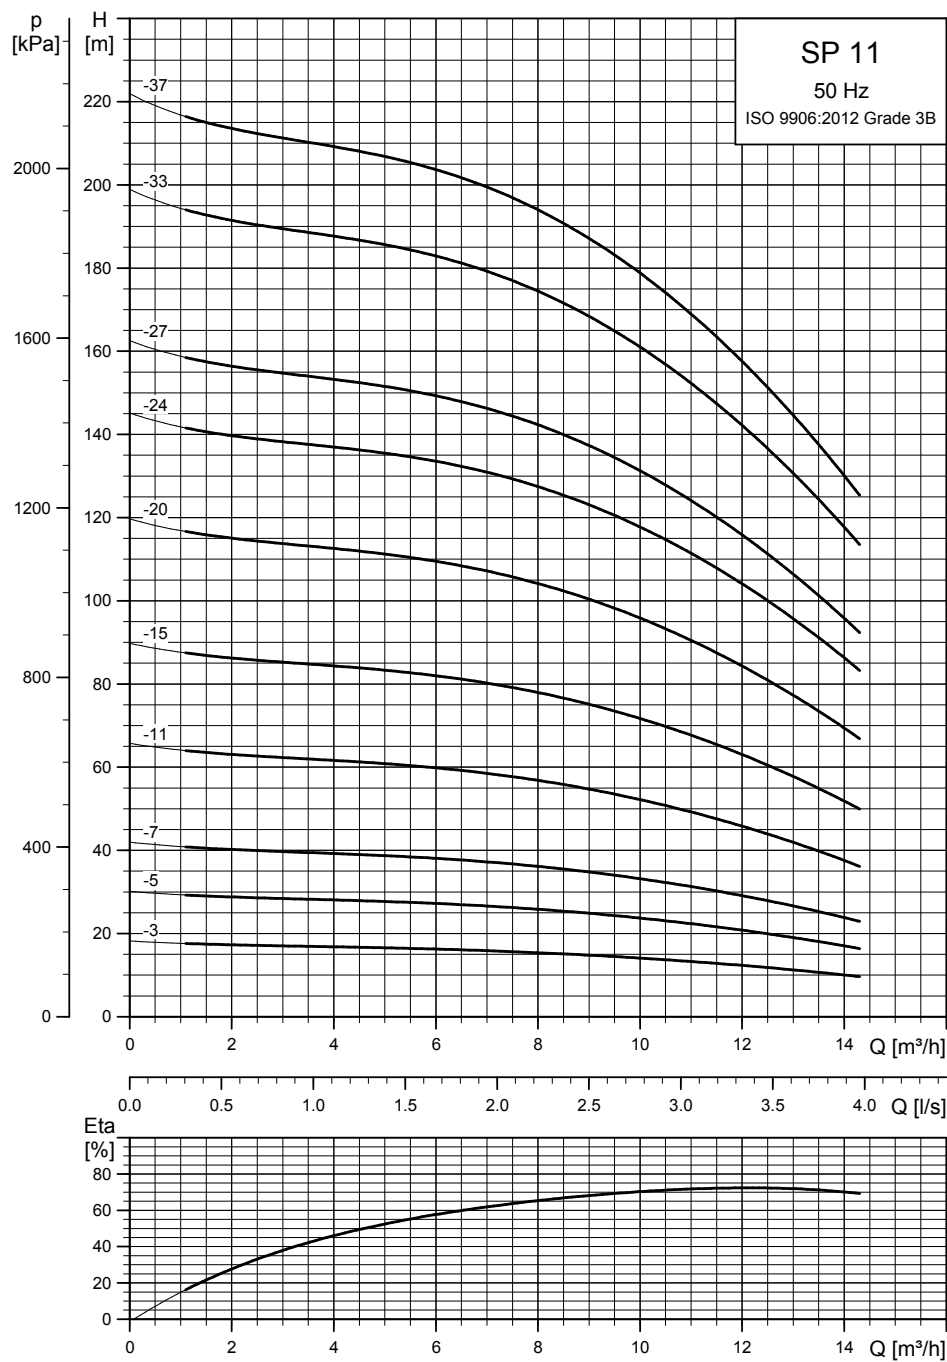


NPSH: Minimum inlet pressure 0.5 m.

Related information

[How to read the curve charts](#)

TM061425

Dimensions and weights

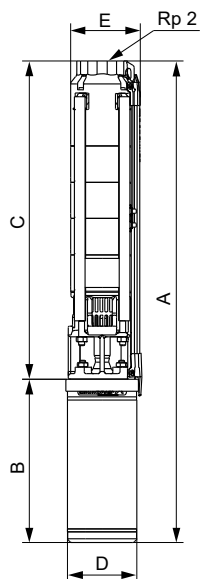


TM080206

Pump type	Motor		Dimensions [mm]					Net weight [kg]
	Type	Power [kW]	C	B	A	D	E	
Single-phase, 1 × 230 V / 1 × 240 V								
SP 11-3	MS 402	0.75	463	306	769	95	101	16.0
SP 11-5	MS 402	1.1	613	346	959	95	101	19.5
SP 11-7	MS 402	1.5	763	346	1109	95	101	21.0
SP 11-11	MS 4000	2.2	1063	577	1640	95	101	34.7
Three-phase, 3 × 220-230 V 50 Hz / 3 × 380-400-415 V 50 Hz								
SP 11-3	MS 402	0.75	463	276	739	95	101	14.8
SP 11-5	MS 402	1.1	613	306	919	95	101	17.7
SP 11-7	MS 402	1.5	763	346	1109	95	101	21.0
SP 11-11	MS 402	2.2	1063	346	1409	95	101	25.6
SP 11-3	MS 4000	0.75	463	402	865	95	101	19.3
SP 11-5	MS 4000	1.1	613	417	1030	95	101	21.9
SP 11-7	MS 4000	1.5	763	417	1180	95	101	23.5
SP 11-11	MS 4000	2.2	1063	457	1520	95	101	28.7
SP 11-15	MS 4000	3	1363	497	1860	95	101	33.8
SP 11-20	MS 4000	4	1738	577	2315	95	101	41.9
SP 11-24	MS 4000	5.5	2038	677	2715	95	101	50.0
SP 11-27	MS 4000	5.5	2263	677	2940	95	101	52.3
SP 11-33	MS 4000	7.5	2713	777	3490	95	101	61.2
SP 11-37	MS 4000	7.5	3013	777	3790	95	101	64.4
SP 11-24	MS 6000	5.5	2101	547	2648	139.5	139.5	60.4
SP 11-27	MS 6000	5.5	2326	547	2873	139.5	139.5	62.8
SP 11-33	MS 6000	7.5	2776	577	3353	139.5	139.5	70.5
SP 11-37	MS 6000	7.5	3076	577	3653	139.5	139.5	73.7

The pump types above are also available in N- and R-versions. See Pump types.
E = Maximum diameter of pump inclusive of cable guard and motor.

Power curves

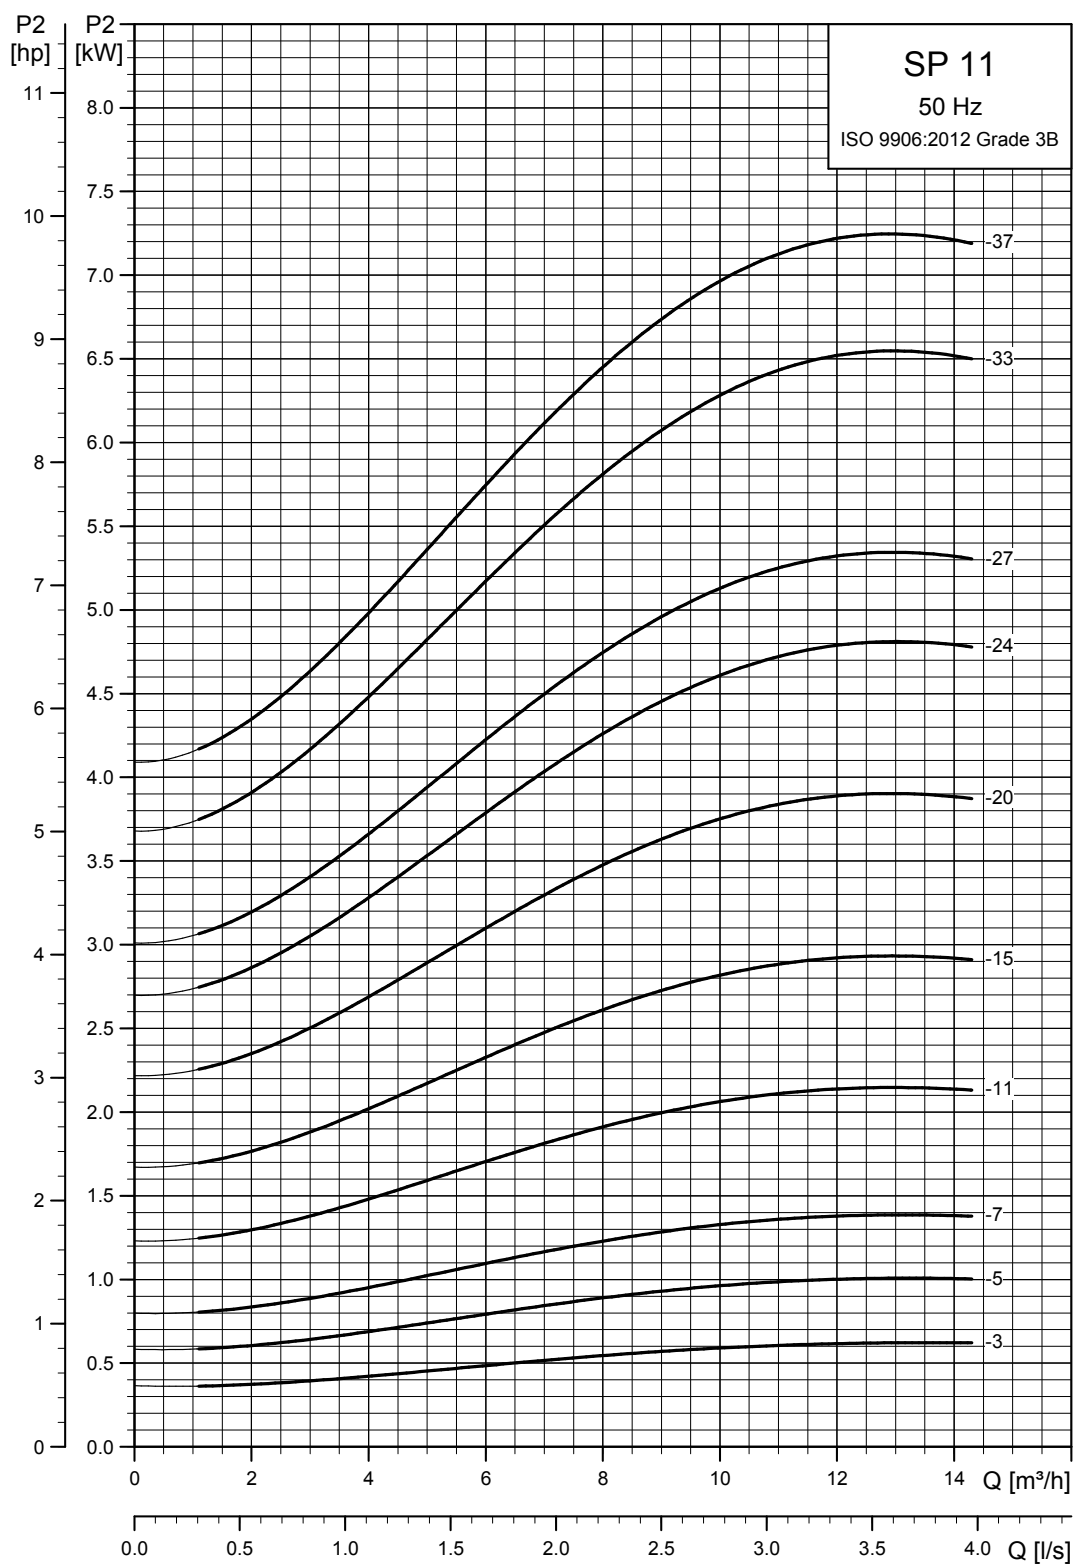

TM061426

Related information

[How to read the curve charts](#)